

# PowerCharge™

PowerChargeEV.com

Charge Up!

## ENERGY SERIES RESIDENTIAL (32A - 40A)

The Energy Series is a powerful, versatile, and durable Level 2 charging station.

Plug-in or hardwire makes this charging station ideal for indoor & outdoor applications.



PowerCharge™

### LEVEL 2 CHARGING STATION

- **Up to 6x faster** with multiple mounting configurations
- **Small footprint** whether wall or pedestal mounted
- **A slim and durable** design that is outdoor rated\* and mounts discreetly in your garage or at your parking space with a simple plug-in installation (\*or hardwire for outdoor installation)
- **Adjustable power** output allows for the ideal power to match your supply panel, electric vehicle, and driving range
- **All-weather** durability
- **Standard 3-year** warranty (5-year warranty optional)

### EASY INSTALLATION

- **Simple** plug-in installation or hardwire for outdoor install

### MULTIPLE CONFIGURATIONS

- **Optional** configurations available to fit your EV charging needs



Single Wall Mount



Dual Wall Mount



Single Pedestal



Dual Pedestal



Quad Pedestal



Single Retractor Pedestal



Dual Retractor Pedestal



### SINGLE PORT CHARGING STATION


- **Level 2 AC, J1772** single port (dual port pedestal and wall mount available)
- **Connector** holster with cable hook included

### CABLE LENGTH


- **Standard** 18 foot (25 foot optional)




**UL-Listed** meets safety criteria for use in North America

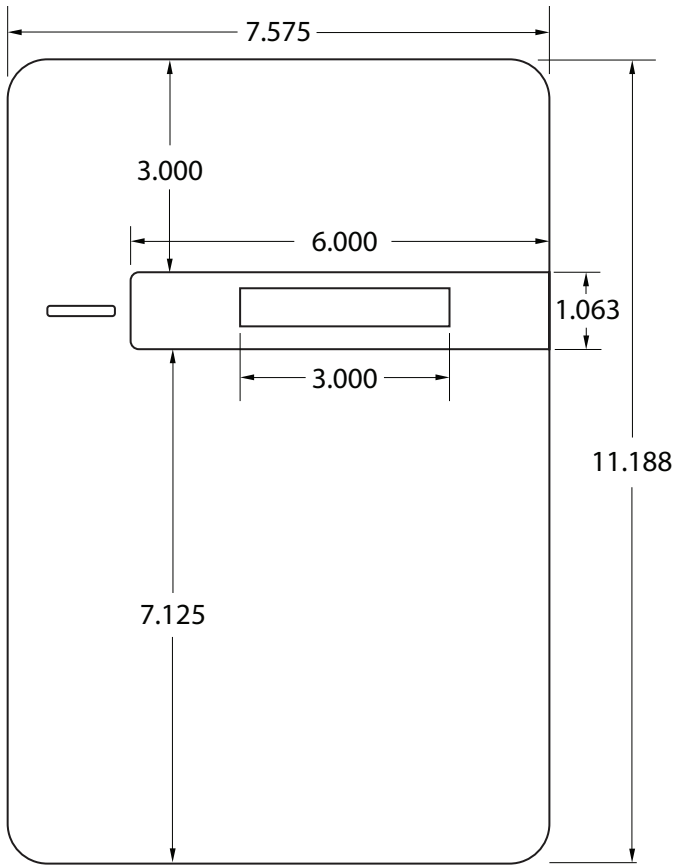


**CHARGER FRONT**

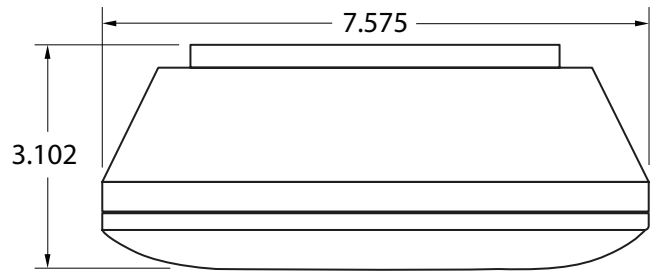


**CHARGER TOP**

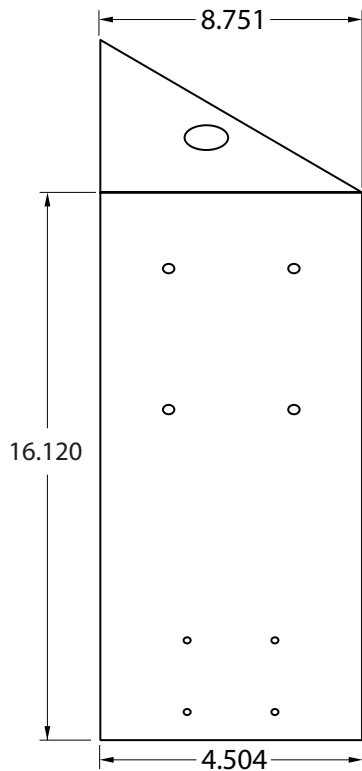


**DUAL MOUNT BRACKET**

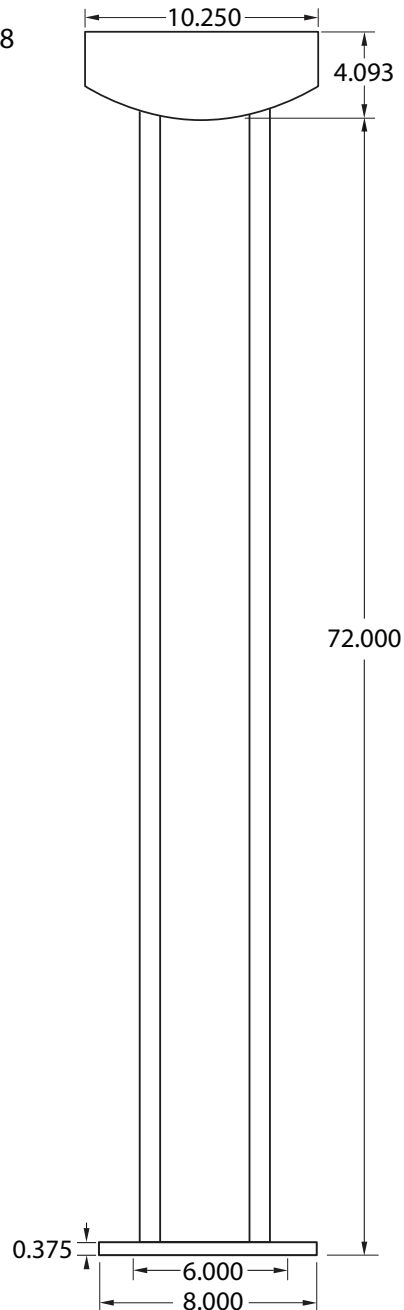

**RETRACTOR  
(SINGLE / DUAL)**

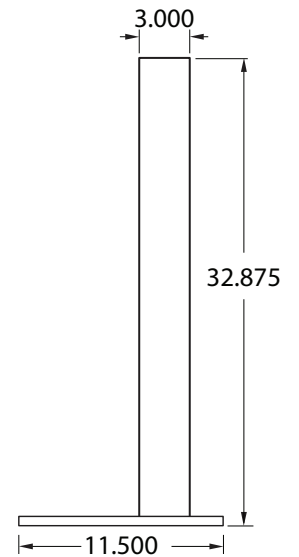

**3x6x32 PEDESTAL  
SIDE**

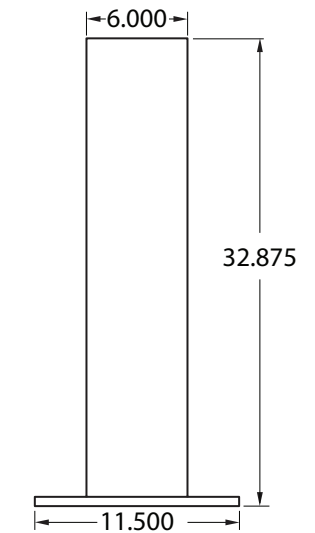

**3x6x32 PEDESTAL  
FRONT/BACK**

CONFIGURATION	OPEN ACCESS
APPLICATION	RESIDENTIAL
VOLTAGE (VAC)	208/240VAC, Single Phase
FREQUENCY (Hz)	60 Hz
CURRENT (RMS)	Adjustable 16A (3.8kW) / 24A (5.8kW) / 32A (7.6kW) / 40A (9.6kW)
CIRCUIT BREAKER	16A = 20A / 24A = 30A / 32A = 40A / 40A = 50A
CHARGING CONNECTOR	SAE J1772
CHARGING CABLE LENGTH	18 ft.
METERING ACCURACY	N/A
REAL-TIME CLOCK	N/A
WI-FI	N/A
CELLULAR	N/A
ETHERNET	N/A
RFID	N/A
DISPLAY	Color LED Status Lights
DATA PROTOCOL	N/A
OPERATION TEMPERATURE	-30°C/-22°F to 50°C/122°F
STORAGE TEMPERATURE	-40°C/-40°F to 70°C/158°F
MOUNTING TYPE	Wall/Pedestal Mount (optional)
DIMENSION (LxWxD, INCHES)	11.14 x 7.56 x 3.11"
IP PERFORMANCE	NEMA 4
IMPACT RESISTANCE	IK10
WIRING TYPE	Plug-In (NEMA 6-50) or Hardwired
CERTIFICATION	UL 50/991/1449/1998/2231/2594 FCC Part 15B
SAFETY	cULus Listed
PEDESTAL DIMENSIONS	48" tall x 11.5" x 11.5" (pedestal) / 72" tall x 11.5" x 11.5" (retractor)
PEDESTAL CONSTRUCTION	Aluminum, Grey Powder-Coat Finish (RAL 7035), Stainless Steel Hardware
WARRANTY	3 Year (5 Year Optional)